


■ Product Introduction

The Dracast Silver Panel Series is a range of professional video LED lights that has six versions: DRSP-500D, DRSP-500B, DRSP-1000D, DRSP-1000B, DRSP-1500D and DRSP-1500B. DRSP-500D/B is made of 480 LED beads. DRSP-1000D/B is 960 and DRSP-1500D/B is 1440. DRSP-500D, DRSP-1000D and DRSP-1500D supports you to adjust brightness. DRSP-500B, DRSP-1000B and DRSP-1500B supports you to adjust brightness and color temperature at the same time. The Dracast Silver Series Panel has an exceptional color rendering index of 96+ and lights consistently. Meanwhile, the dual power system, practical soft diffusion, and 360° rotation hot shoe improve your light set-up and stabilization system.


■ Main Features

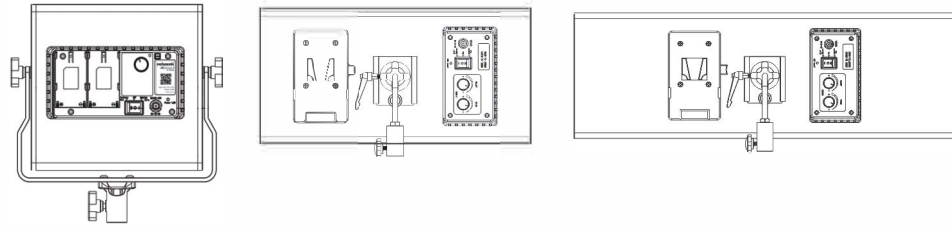

DRSP-500D/DRSP-500B DRSP-1000D/DRSP-1000B DRSP-1500D/DRSP-1500B


- Ultra Heat Dissipation
- Delicate Design with Aviation Aluminum Alloy Housing
- High Color Rendering Index, CRI96+
- PWM Dimming Technology
- Brightness Adjustment
- Color Temperature Adjustment
- Dual Power System
- Convenient Light Set-Up and Stabilization system

■ Front View

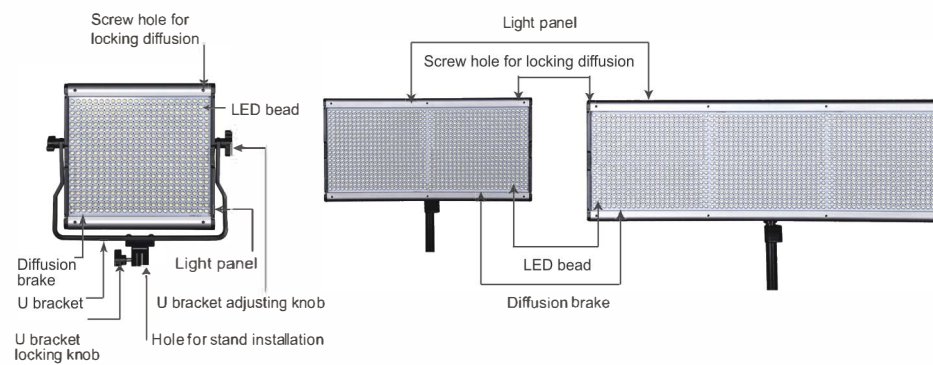

DRSP-500D/DRSP-500B DRSP-1000D/DRSP-1000B DRSP-1500D/DRSP-1500B


■ Back View

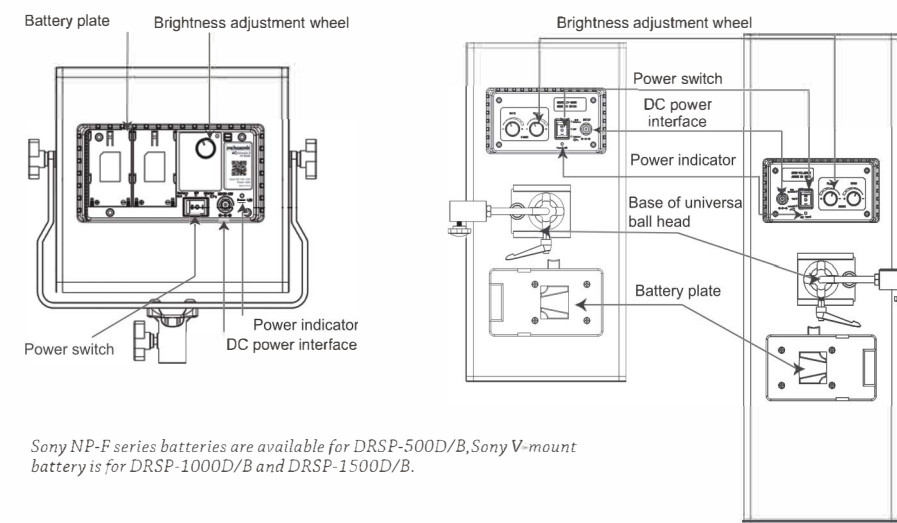

DRSP-500D/DRSP-500B DRSP-1000D/DRSP-1000B DRSP-1500D/DRSP-1500B

Sony NP-F series batteries are available for DRSP-500D/B, Sony V-mount battery is for DRSP-1000D/B and DRSP-1500D/B.

■ Accessories

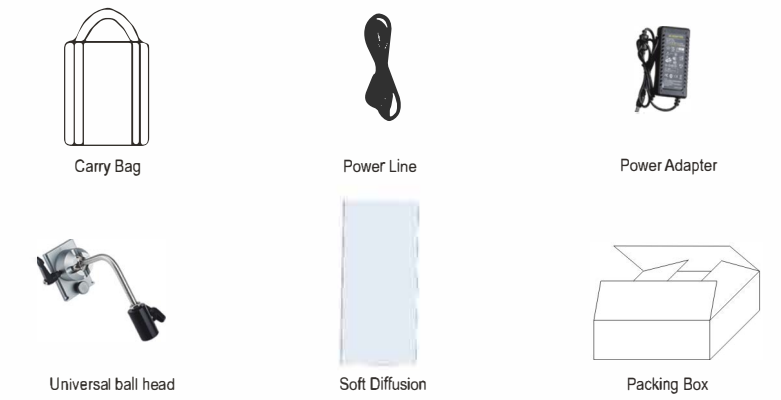

■ Operations

- 1 Pull the universal ball head into its base. Set the angle as you want (360 degree available).
 - 2 Install the Panel Silver on the light stand by rotating clockwise, counterclockwise to uninstall it.
 - 3 Insert the soft diffusion into the light panel sides.
 - 4 Insert the DC adapter/ Put on the battery. Turn on the power switch.
 - 5 Rotate the brightness adjustment wheel clockwise to increase your brightness. Set your required color temperature by the mixture brightness of two kinds of beads with different color temperatures.
- Note: The brightness will be changed while you are setting your color temperature.

■ Specifications

Model	DRSP-500D/DRSP-500B	DRSP-1000D/DRSP-1000B	DRSP-1500D/DRSP-1500B
Details			
LED Bead	480	960	1440
CRI	96+	96+	96+
Voltage	DC12	DC14.8	DC14.8
Max. Lumen	3940LUX@0.5m	9800LUX@0.5m	12000LUX@0.5m
Color Temperature	5600(±50) 3200~5600(±50)	5600(±50) 3200~5600(±50)	5600(±50) 3200~5600(±50)
Power Consumption	30W	60W	90W
Size	260*265*48	412*200*48mm	612*200*48mm
Weight	1037g/37oz	1562g/ 55oz	2188g/77oz


Attention

1. Do not look at the working light directly.
2. Do not cover the working light, or it will avoid the product cooling to damage it.
3. Do not place the Lightmate at flammable items such as alcohol, gasoline or near volatile solvent.
4. Do not place any liquid on the Lightmate interior or fall into the Lightmate.
5. Power off when you finish use the Lightmate in case of a fire.
6. Carefully to move the Lightmate in case of dropping it down.

DRACAST

www.dracast.com

DRACAST

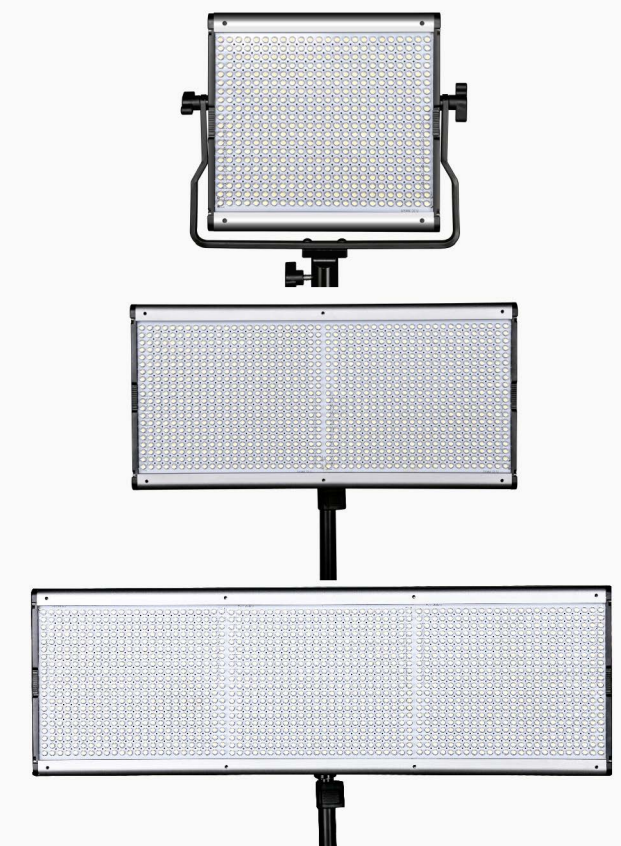

DRSP-500D/DRSP-500B/
DRSP-1000D/DRSP-1000B/
DRSP-1500D/DRSP-1500B

Product Manual